



2.0E PWLVL WINDOW & PATIO DOOR HEADERS

1-STORY

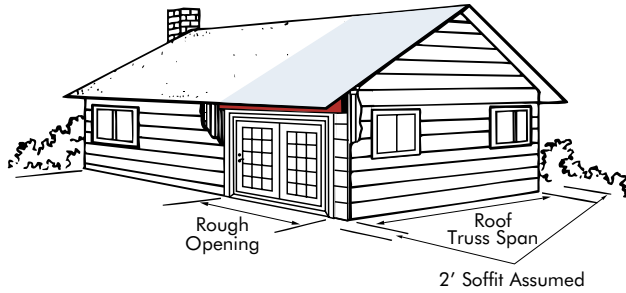

This table provides PWLVL header sizes for the support of roof trusses over various rough openings. A 2 foot maximum roof overhang is assumed.

2-STORY

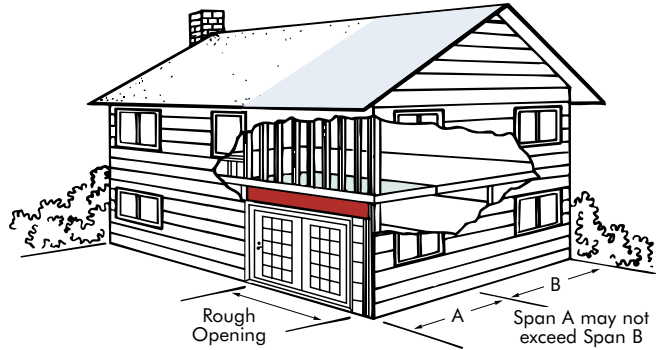

This table provides PWLVL header sizes for the support of one level of floor framing, an exterior wall and roof trusses over various rough openings. A 2 foot maximum roof overhang and center support for the floor framing are assumed.

1-STORY – 1 3/4" x 2.0E PWLVL

Roof Loading		Snow (115%)										Non-Snow (125%)														
		25 psf LL + 20 psf DL					40 psf LL + 20 psf DL					20 psf LL + 15 psf DL					20 psf LL + 25 psf DL									
Width of Building		6'	8'	9'	10'	12'	6'	8'	9'	10'	12'	6'	8'	9'	10'	12'	6'	8'	9'	10'	12'					
Roof Truss Span with 2' Soffit Assumed	20'	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"
		3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"
	24'	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"
		3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"
	28'	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-14"	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"
		3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"
	32'	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"
		3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"
	36'	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"
		3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"

Notes:

- PWLVL header sizes are listed as the number of 1 3/4" thick pieces by the header depth, e.g. 2 - 9 1/2" indicates two 1 3/4" pieces by 9 1/2" deep.
- All PWLVL headers require support across their full width.
- The minimum required bearing length (based on 850 psi) is 3".
- The roof framing is assumed to be trusses supported by the exterior walls only.
- Deflection is limited to L/240 at live load and the lesser of L/180 or 5/16" at total load.

2-STORY – 1 3/4" x 2.0E PWLVL

Roof Loading		Snow (115%)										Non-Snow (125%)														
		25 psf LL + 20 psf DL					40 psf LL + 20 psf DL					20 psf LL + 15 psf DL					20 psf LL + 25 psf DL									
Width of Building		6'	8'	9'	10'	12'	6'	8'	9'	10'	12'	6'	8'	9'	10'	12'	6'	8'	9'	10'	12'					
Roof Truss Span with 2' Soffit Assumed	20'	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"	2-7/4"	2-9 1/2"	2-9 1/2"	2-11 7/8"	2-14"
		3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"
	24'	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"
		3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-7/4"	3-9 1/2"	3-11 7/8"	3-7/4"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"
	28'	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"
		3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"
	32'	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-11 7/8"	2-11 7/8"	2-14"	2-18"	2-7/4"	2-9 1/2"	2-11 7/8"	2-11 7/8"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"
		3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-11 7/8"	3-11 7/8"	3-16"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"
	36'	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-11 7/8"	2-11 7/8"	2-14"	2-18"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"	2-7/4"	2-9 1/2"	2-11 7/8"	2-14"	2-16"
		3-7/4"	3-9 1/2"	3-11 7/8"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-11 7/8"	3-11 7/8"	3-16"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"	3-7/4"	3-9 1/2"	3-9 1/2"	3-11 7/8"	3-14"

+ see note 3

Notes:

- PWLVL header sizes are listed as the number of 1 3/4" thick pieces by the header depth, e.g. 2 - 9 1/2" indicates two 1 3/4" pieces by 9 1/2" deep.
- All PWLVL headers require support across their full width.
- The minimum required bearing length (based on 850 psi) is 3" unless the + symbol is shown. In that case, 4 1/2" is required.
- PWLVL header sizes are based on residential floor loading of 40 psf live load and 10 psf dead load, and an exterior wall weight of 100 plf. The roof framing is assumed to be trusses supported by the exterior walls only.
- Deflection is limited to L/360 at live load and the lesser of L/240 or 5/16" at total load.
- PWLVL header sizes are based on the assumption that the floor joists are supported in the middle of the building by a beam or wall.